Polk K-11

LAND CORNER RECORD

Index: L11	Corner: Center 1/4			*State of Indiana - Hoosier National Forest*
Section: 16	Township: 7N	Range: 1E	P.M.: 2nd	County: Monroe
Coordinate:	Lat./N:		Lon./E:	Datum:

CORNER HISTORY: (Chronological history of corner)

1.) Date of Survey:	Surveyor:	Monument:	Recording Information:	
1980	T. Cummings	Stone		
Reference Objects:	Species:	Diameter:	Bearing:	Distance:
	S. Oak	10"	S 64° W	6.4'
	Hickory	6"	N 24° E	23.08'
	S. Oak	10"	N 44° W	11.5'
Evidence Found:				
Monument Found:	4"x7"x9" high w/ "+" on top.			

2.) Date of Survey:	Surveyor:	Monument:	Recording Information:	
December 2, 2002	R. Stone	Stone		
Reference Objects:	Species:	Diameter:	Bearing:	Distance:
	S. Oak	13"	S 63° W	6.4'
	Hickory	7"	N 23° E	22.8'
	Wood Post	4"x4"	East	2.0'
Evidence Found:				
Monument Found:	4 1/2"x7" sq. limestone w/ "+" in top.			

Monument Photograph:

ACCESSORIES: Bearing and distance from monument to witness object.

Reference Objects:	Object or Tree Species:	Diameter:	Bearing:	Distance:
	Hickory	7"	N 25° E	23.50'
	Oak	13"	N 17° W	30.63'
	S. Oak	14"	S 62° W	6.51'
Monument Found or Set:	Found 4-1/2"x7" limestone 0.65' above grade with a "+" on top			

MONUMENT SKETCH



NARRATIVE REFERENCE:

The monument is a 4-1/2" x 7" limestone found 0.65' above grade with a "+" on top, located on the south edge of a ridge top 43' east of an old road bed running southwest to northeast, and 41' west of the old road bed on the ridge top. The two roads intersect about 50' north of the stone.

SECTION DIAGRAM



Corner Location = ●

PERPETUATION RECORD:

Monument found undisturbed per 2002 Land Corner Record. Two existing bearing trees were remarked. One new bearing tree was established.

Section: 16	Prepared By: BRG #7308	Date: 12/27/2012

Approved by SRB 2-26-2013

MONUMENT RECORD
State of Indiana - County of Monroe

Section: 16 **Township:** 7 North **Range:** 1 East **Corner ID:** Polk K-11

Monument Description & Remarks: Limestone with "X", length 0.57ft, width 0.40ft, height 0.70ft. Survey Sign 4ft above ground at pt. C

References On File: Legal Survey Book 3, page 58 survey, MC Deputy Surveyor Hobart Van Buskirk, on file in Surveyor Office

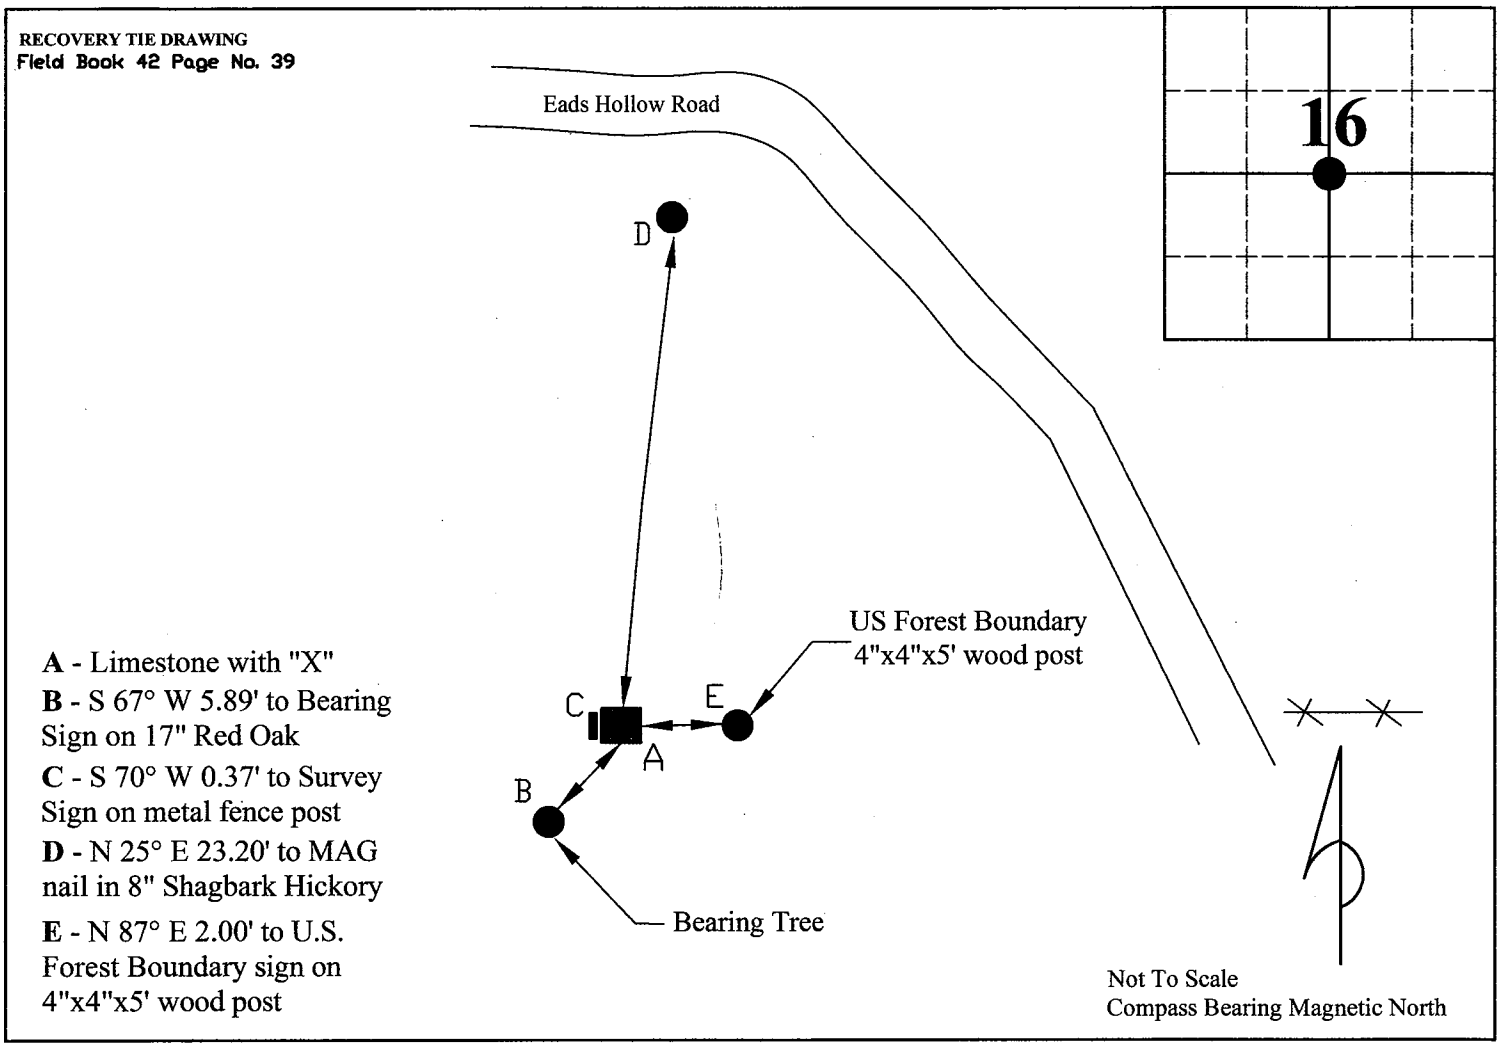

I, Kevin P. Enright, Monroe County Surveyor, hereby certify that this document was prepared under my direction in accordance with the provisions of section 36-2-12-11 of the Indiana Code; and the above data is given under my hand and seal this 7th day of April, 2009.

Kevin Enright

SURVEYOR SEAL MONROE COUNTY INDIANA

MONROE COUNTY SURVEYOR REVIEW BOARD SEAL

Administered by the Monroe County Surveyor Review Board

Date: 5-12-2009

Drawn by: T.E.R Print date: April 14, 2009

LAND CORNER RECORD

Index: L11	Corner: Center 1/4			*State of Indiana - Hoosier National Forest*
Section: 16	Township: 7N	Range: 1E	P.M.: 2nd	County: Monroe
Coordinate:	Lat./N:		Lon./E:	Datum:

CORNER HISTORY: (Chronological history of corner)

1.) Date of Survey:	Surveyor:	Monument:	Recording Information:	
1980	T. Cummings	Stone		
Reference Objects:	Species:	Diameter:	Bearing:	Distance:
	S. Oak	10"	S 64° W	6.4'
	Hickory	6"	N 24° E	23.08'
	S. Oak	10"	N 44° W	11.5'
Evidence Found:				
Monument Found:	4"x7"x9" high w/ "+" on top.			

2.) Date of Survey:	Surveyor:	Monument:	Recording Information:	
December 2, 2002	R. Stone	Stone		
Reference Objects:	Species:	Diameter:	Bearing:	Distance:
	S. Oak	13"	S 63° W	6.4'
	Hickory	7"	N 23° E	22.8'
	Wood Post	4"x4"	East	2.0'
Evidence Found:				
Monument Found:	4 1/2"x7" sq. limestone w/ "+" in top.			

Monument Photograph:

ACCESSORIES: Bearing and distance from monument to witness object.

Reference Objects:	Object or Tree Species:	Diameter:	Bearing:	Distance:
	Hickory	7"	N 25° E	23.50'
	Oak	13"	N 17° W	30.63'
	S. Oak	14"	S 62° W	6.51'
Monument Found or Set:	Found 4-1/2"x7" limestone 0.65' above grade with a "+" on top			

MONUMENT SKETCH



NARRATIVE REFERENCE:

The monument is a 4-1/2" x 7" limestone found 0.65' above grade with a "+" on top, located on the south edge of a ridge top 43' east of an old road bed running southwest to northeast, and 41' west of the old road bed on the ridge top. The two roads intersect about 50' north of the stone.

SECTION DIAGRAM



Corner Location = ●

PERPETUATION RECORD:

Monument found undisturbed per 2002 Land Corner Record. Two existing bearing trees were remarked. One new bearing tree was established.

Section: 16	Prepared By: BRG #7308	Date: 12/27/2012

POLK K11

R9-7150-15 (5/64)

CERTIFIED LAND CORNER RESTORATION

State of Indiana
County of ..... } ss.

I ....., do hereby certify that on the ..... day of ....., 19....., I found evidence of the Center 1/4 section corner of Section 16 Township 7 North, Range 1 East, Second Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner:

Description of original monument and accessories and subsequent restorations:

Description of corner evidence found:

Found a limestone corner 6"x4" set 8" above ground with a large + on top. No other marks. Located approximately 250' NW of old homesite and about 50' S of intersection of trails.

Description of monument and accessories I established to perpetuate the original location of this corner:

Established following witnesses:

B.T.	B.T.	B.T.
B. Oak	B. Oak	Hick.
10"	8"	5"
S 64° W	N 44° W	N 24° W
6.4'	11.2'	23.1'

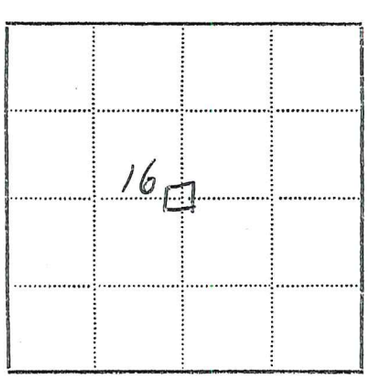

● = Corner monument restored
□ = Stone

Resident witnesses .....

Dated at ..... Indiana, this ..... day of ..... 19.....

Signature ..... Title .....
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Surveyors Registration No. .....

Office of ..... County of .....,
I hereby certify that the within instrument was filed in this office for record on the ..... day of ..... 19....., and was filed in Book No. ..... Page No. ..... of County Records.

Signature ..... Title .....

Township 7N, Range 1E, Section 16, Index No. L-11, Page No. .....

Index No. 4-11 (Alphabetical – Numerical)

LAND CORNER RECORD
(RECTANGULAR SURVEYS)

R9-7150-4 (Rev. 6/13/67)
GPO 802-127

T. 7N R. 1E 2nd Mer. N.F. Hoosier County Monroe State Ind.
Center 1/4 Section Corner common to sections 16 , , and

EXISTING SURVEYS

Original Government Survey

Year surveyed
Original monument (Wood post, stone, pile of stones, pipe, etc.)

Bearing Trees

Species				
Diameter				
Bearing				
Distance				

Original Evidence Found

Year of search 1975 By H. Denton - T. Harrell
Monument found

Original Bearing Trees Found

Species				
Diameter				
Bearing	None			
Distance				

Subsequent Corner Restoration

Year surveyed. By
Where filed or recorded
Monument (Original, concrete post, iron rod, etc.)

Bearing Trees, Reference Objects

Species				
Diameter				
Bearing				
Distance				

Evidence of Subsequent Corner Restoration Found

Year of search 1975 By H. Denton - T. Harrell
Found Sandstone 7" x 4½" - 9" high
marked with + on top. Stone is
approximately 43' west of ℄ of dirt trail.
An E-W tree line is to the east of stone

Bearing Trees, Reference Objects



Sketch

○ Corner ▨ F.S. Land

Relation of Evidence to Record Features Along Section Lines

Section line to sections				
Object				
Record distance				
Measured distance				

Other Evidence

Describe evidence of use and occupation such as roads, fences, clearings, timber cutting lines, plantations, etc.. Cite source of testimony if any.

At time of search:

1. Did you have the record description? Yes ____ No ____
2. How was search area located? Pacing, chaining, photos, maps, etc.
3. Man hours spent in search 1 hr.
4. Do you think additional search might recover evidence? Yes ____ No ____
5. Signature H. Denton

Perpetuation Record

Monument and accessories established. Include brief description of area.

Certified corner restoration certificate prepared: Yes ____ No ____
Filed in county records at ____ Date ____ County Document No. ____
Identifed on aerial photo No. ____ Which is filed at ____



Sketch

○ Corner ▨ F.S. Land

Relation of Evidence to Record Features Along Section Lines

Section line to sections				
Object				
Record distance				
Measured distance				

Other Evidence

Describe evidence of use and occupation such as roads, fences, clearings, timber cutting lines, plantations, etc.. Cite source of testimony if any.

Located in angle of two trails one to the N.W. 30'± the other to the N.E. 55'±, Stone is on S.W. facing slope, old homesite to the S.E. app. 150'.

At time of search:

1. Did you have the record description?
   Yes X No ____
2. How was search area located?
   Pacing, chaining, photos, maps, etc. ____
3. Man hours spent in search 5 min.
4. Do you think additional search might recover evidence? Yes ____ No X
5. Signature Tim Cummings

Perpetuation Record

Monument and accessories established. Include brief description of area.

B.T.	B.T.	B.T.
Scarlet Oak	Scarlet Oak	Hickory
10" D.B.H.	10" D.B.H.	6" D.B.H.
S. 64° W.	N. 44° W.	N. 24° E.
6.4'	11.5'	23.08'
nail in stump	nail in stump	nail in stump.

Certified corner restoration certificate prepared: Yes ____ No ____

Filed in county records at ____ Date ____ County Document No. ____

Identified on aerial photo No. ____ Which is filed at ____

Index No.: ____ (Alphabetical – Numerical)

VII

LAND CORNER RECORD
(RECTANGULAR SURVEYS)

R9-7150-4 (Rev. 6/13/67) GPO 802-127

T. 7N R. 1E 2nd Mer. N.F. Hoosier County Monroe State Ind.

C.S. 1/4 Corner common to sections 16 and ____

EXISTING SURVEYS

Original Government Survey

Year surveyed ____

Original monument ____

Distance ____

Original Evidence Found

Year of search 1980 By Tim Cummings

Monument found None

Original Bearing Trees Found

ies ____

ster ____

ng ____

nce ____ None

Evidence of Subsequent Corner Restoration Found

of search 1980 By Tim Cummings

mestone 4"x7"x9" high, w/ tonTop

Bearing Trees, Reference Objects

T.7N R.1E Sec. 16 C 1/4 8/5/81

Limestone 6"x4"x4" 5" out of ground. No other marks

Large # in top. No

Located approx. 250' NW of old homesite and 50' S of trails intersecting E-W

B.T. Hick. 5" N24°W 23.1'

B.T. B.Oak 8" N44°W 11.2'

B.T. B.Oak 10" S64°W 6.4'